Instructions for Installing Varmint Master and "Targeteer" Attachments

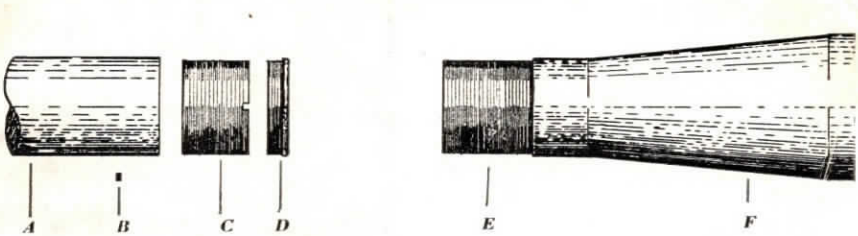

WEAVER 29S, 330 and 440 SCOPES

1. Remove retaining ring C from scope tube.
2. Tap scope tube to remove fiber disk and objective lens.
3. Place fiber washers in tube A if necessary to take up extra space.
4. Replace retaining ring C in scope tube A very tightly.
5. Screw Varmint Master Attachment F tightly into scope tube A.

WEAVER K-2.5 and K-4 SCOPES

1. Remove lens cell C containing objective lens from scope tube A.
2. Screw Varmint Master Attachment F tightly into scope tube A.

LYMAN ALASKAN SCOPE

1. Remove ring D from scope tube A.
2. Remove small screw B from scope tube A.
3. Remove objective lens C from scope tube A.
4. Screw Varmint Master Attachment F tightly into scope tube A.

G88- SCOPE

1. Remove ring D from scope tube A.
2. Remove objective lens C from scope tube A.
3. Screw Varmint Master Attachment F tightly into scope tube A.

TEXAN SCOPE

1. Remove ring D from scope tube A.
2. Remove small screw B from scope tube A.
3. Remove objective lens C from scope tube A.
4. Screw Varmint Master Attachment F tightly into scope tube A.

To focus attachment screw the lens cell in or out until desirable focus is obtained. Lock graduated Collar tightly against focusing Cell.

To return scopes to original power reverse the above instructions.

R. A. LITSCHERT

Winchester **Indiana**